


# TA-80 UHF Digital Plug-on Transmitter

## Features

- The compact aluminum alloy housing that isolates RF spurious and noise interference, is equipped with a built-in high efficiency transmitting antenna and a green backlit LCD, which displays operation parameters.
- Features a flat and wide frequency response, ultra-low THD and noise floor, fast transient response, and high S/N ratio. It solves the problems of tangling microphone cables and defects of analog transmission. Thus, it is an ideal gear to reproduce the natural sound of any premium wired microphone.
- A balanced XLR input jack for any condenser microphone to plug on.
- Supplies selectable 12 / 48 V phantom power at 10 mA for condenser microphones.
- A high-capacity lithium-ion battery that enables up to 8 hours of use per charge. After use, directly plug it into a charger to recharge or simply remove the battery.

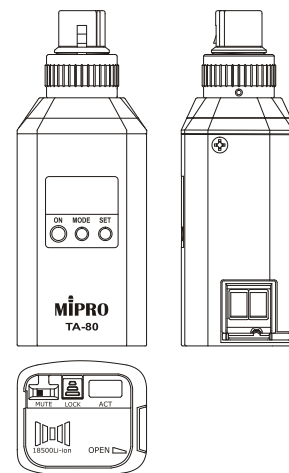

## Specifications

Frequency Band	UHF 480 – 960 MHz
Bandwidth	72 MHz
RF Power Output	10 / 50 mW switchable (country dependent)
Gain Setting	-18 to 30 dB, 9 selectable settings
AF Input Level	2 V max. @ 0 dB
Phantom Power	12 V / 48 V @ 10 mA max.
Battery Type	One 18500 Li-ion battery
Battery Charging	MP-8T charging station
Dimensions	44 × 114 × 39 mm (W × H × D)
Weight	Approx. 180 g